

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
25 March 2004 (25.03.2004)

PCT

(10) International Publication Number  
**WO 2004/024342 A1**

(51) International Patent Classification<sup>7</sup>: **B05C 17/005**,  
E04F 21/30

(21) International Application Number:  
PCT/AU2003/001183

(22) International Filing Date:  
10 September 2003 (10.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002951335 11 September 2002 (11.09.2002) AU

(71) Applicants and

(72) Inventors: **WILLERS, Andrew** [AU/AU]; 4 Rosedale  
Place, Helensvale, QLD 4212 (AU). **JEZUCHOWSKI,**  
**Friedhelm** [AU/AU]; 47 Mount Pleasant Road, Nunawad-  
ing, VIC 3131 (AU).

(74) Agent: **FREEHILLS CARTER SMITH BEADLE**;  
Level 43, 101 Collins Street, Melbourne, VIC 3000 (AU).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,  
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: NOZZLE FOR SEALANT CARTRIDGES

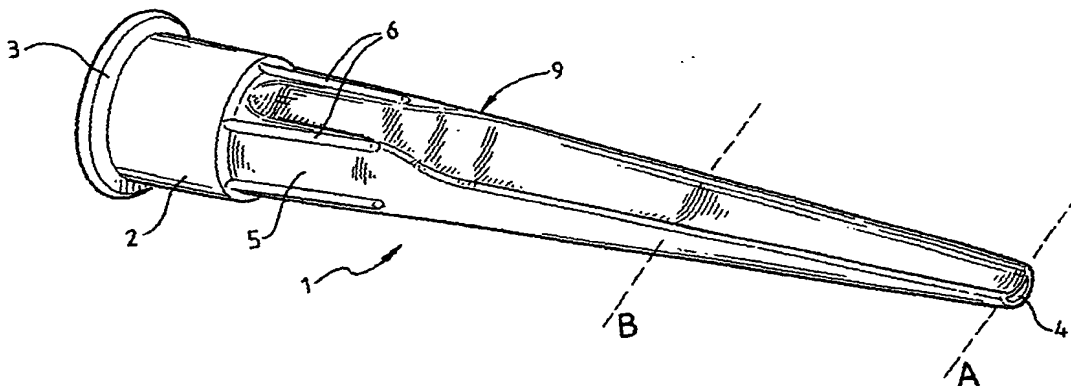

(57) **Abstract:** This invention concerns a nozzle (1) for sealant cartridges that are typically used in caulking guns. The nozzle (1) includes an inlet end portion (2) that enables attachment of the nozzle (1) to a cartridge. The nozzle (1) has a tapered body (9) that terminates at an outlet (4). The tapered body (9) includes a cavity formed with a cross-sectional profile of triangle, arcuate or a crescent shape. Such profile produces a correspondingly shaped bead that permits less skilled working of the bead to achieve the desired chamfer or bevel on the sealant.